

QPA-70-1500-42-40S

0.07~1.5GHz, 42dB, 40dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	0.07~1.5GHz
Small Signal Gain:	42dB min.
Gain Flatness:	2±2dB max.
Output Power (Psat):	40dBm min.
Input Power:	2±2dBm
	+5dBm max.
Spurious:	-65dBc max.
Harmonic:	-10dBc max.
Input VSWR:	1.8 max.
Voltage:	28~32V/5A VCC (Reference)
	+32V max.
PTT:	3.3~5V (On)
Current:	2.5A max.
Impedance:	50Ω

Mechanical

Size* ¹ :	174.6*77.8*26.5mm
	6.874*3.063*1.043in
Weight:	520g max.
RF Connectors:	SMA Female
Power Supply Connectors* ² :	Feed Through/Terminal Post
Mounting:	4-Φ3.2mm through-hole


[1] Exclude connectors.

[2] Install heat sink during testing.

Environmental

Operating Temperature:	-25~+55°C
------------------------	-----------

Outline Drawings

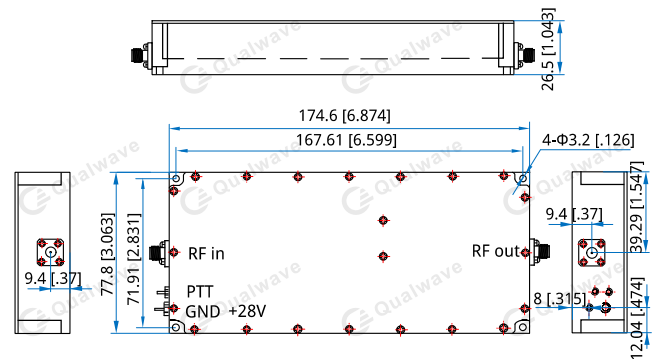

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QPA-70-1500-42-40S

Customization is available upon request.