

QRJ8-3000-60

Channel 8, DC~3GHz, 60mm

Features:

- * Low VSWR
- * Low VSWR Flatness
- * Low Insertion Loss Flatness

Applications:

- * High Speed Digital Signal Transmission
- * Analog Signal Transmission

Electrical

Frequency:	DC~3GHz
VSWR:	1.3 max. (Channel 1) 1.5 max.
VSWR Flatness:	0.1 max.
Insertion Loss:	0.8dB max. (Channel 1) 1.1dB max. 1.2dB max. (Channel 7~8)
Insertion Loss Flatness:	0.1dB max. (Channel 1) 0.15dB max.
Isolation:	65dB min.
IP Grade:	IP 66
Input Power:	10W@1GHz max.

Mechanical

Connectors:	SMA female
Rotating Speed:	60RPM max.
Operation Life:	5M Cycles min.

Environmental


Operating Temperature:	-55~+85°C
------------------------	-----------

How To Order

QRJ8-3000-60

Customization is available upon request.

Outline Drawings

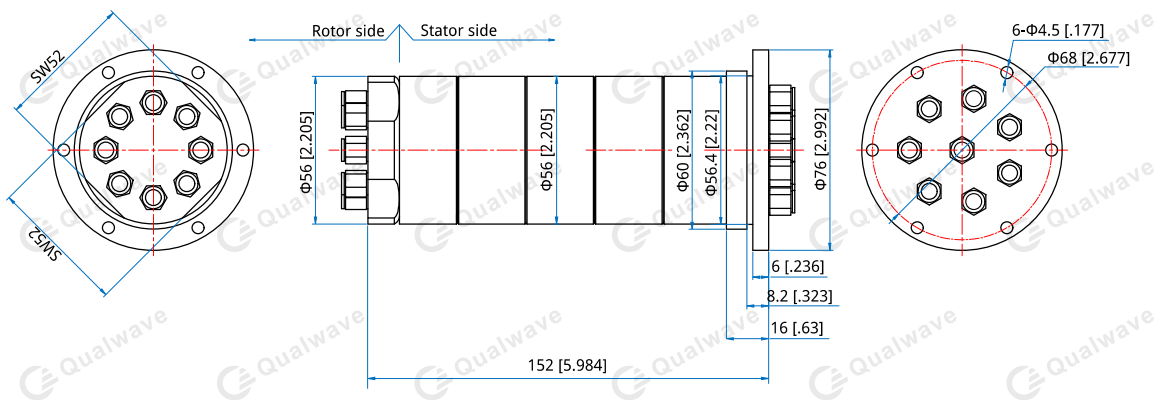

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]