

QWRJ1-18000-42-I-A

Single Channel, 6.5~18GHz, 42mm, I-type

- | | |
|-------------------------------|--|
| Features: | Applications: |
| * Low VSWR | * High Speed Digital Signal Transmission |
| * Low VSWR Flatness | * Analog Signal Transmission |
| * Low Insertion Loss Flatness | |

Electrical

Frequency: 6.5~18GHz
 VSWR: 1.35 max.
 Insertion Loss: 0.45dB max.


Mechanical

Interface: WRD-650
 Flange: FPWRD650
 Material: Aluminium
 Finish: Conductive oxidation
 Coating: Black paint
 Style: I-type

Environmental

Temperature: -40~+85

Outline Drawings

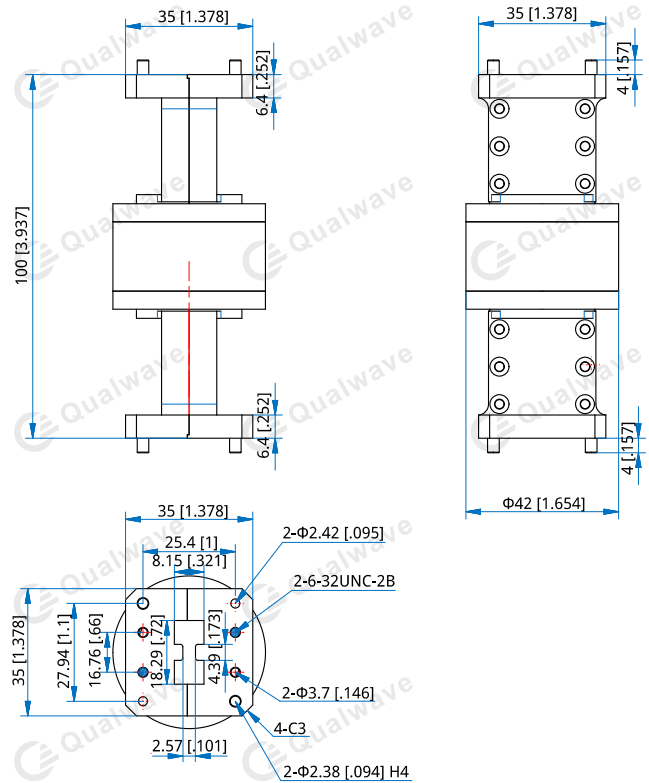

Unit: mm [in]
 Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

QWRJ1-18000-42-I-A

Customization is available upon request.