

QVA-4000-8000-64-S

4~8GHz, 0~64dB

Features:

- * Broadband
- * High Dynamic Range

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	4~8GHz
Insertion Loss:	2dB max.
Attenuation Flatness:	±2dB max.
Attenuation Range:	0~64dB
VSWR:	1.8 max.
Voltage:	DC~10V DC
Current:	40mA max.
Power:	1W max.
Impedance:	50Ω

Mechanical


Size*1:	32*16*7mm 1.26*0.63*0.276in
RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+85°C
Non-operating Temperature:	-55~+125°C
Vibration:	25g rms (15°C & 2KHz)
Humidity:	100% RH at 35°C, 95% RH at 40°C
Shock:	20G for 11msc

Outline Drawings

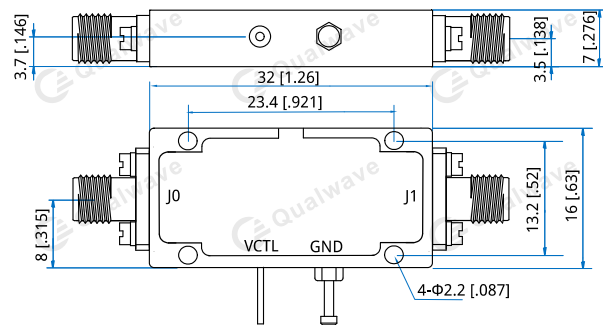

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QVA-4000-8000-64-S

Customization is available upon request.