

QWFA10-R5

WR-10, 0.5W

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar


Electrical

Frequency:	73.8~110GHz
VSWR:	1.25 max.
Attenuation:	3, 5, 6, 9, 10, 15, 20, 30, 40dB
Average Power:	0.5W

Mechanical

Connectors:	WR-10 (BJ900)
Flange:	UG-387/UM
Material:	Copper
Coating:	Gold plated

Outline Drawings

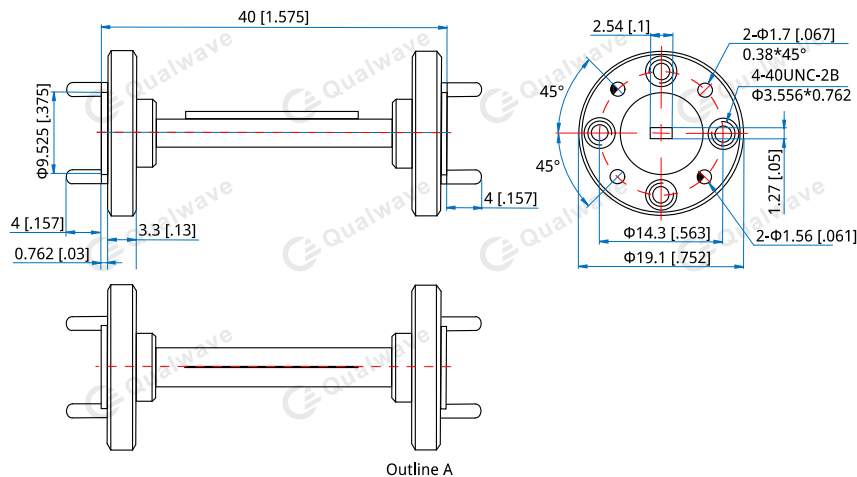

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

QWFA10-R5-X-Y-Z

X: Attenuation in dB(3, 5, 6, 9, 10, 15, 20, 30, 40 - Outline A)

Y: Material

Z: Flange type

Material naming rules:

C - Copper (Outline A)

Flange naming rules:

12 - UG-387/UM (Outline A)

Examples:

To order a Waveguide Fixed Attenuator, 73.8~110GHz, 10dB, Copper, UG-387/UM, specify QWFA10-R5-10-C-12.

Customization is available upon request.