

QWFA15-5

WR-15, 5W

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

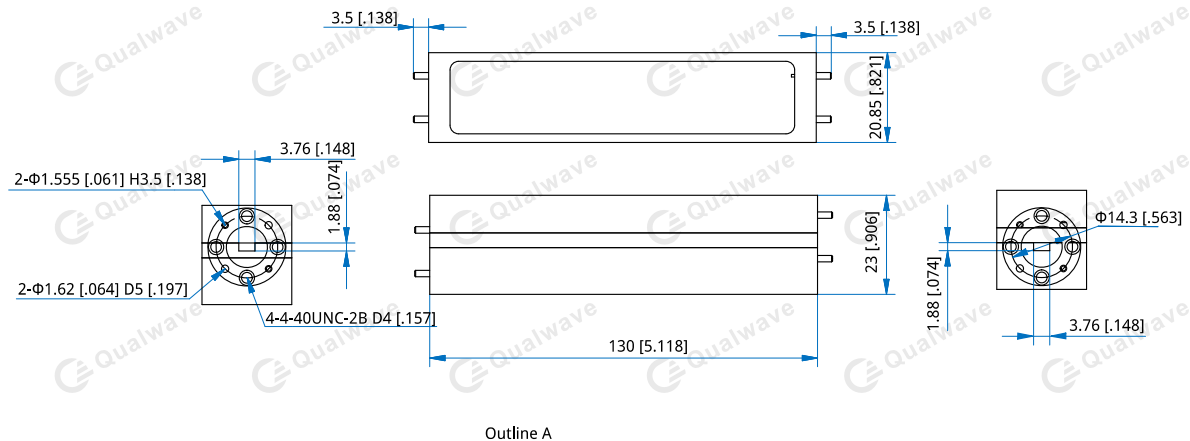
- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	50~75GHz
VSWR:	1.2 max.
Attenuation:	10±1dB
Average Power:	5W min.

Mechanical

Connectors:	WR-15 (BJ620)
Flange:	UG-383/U
Material:	Copper
Coating:	Gold plated

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order
QWFA15-5-X-Y-Z

X: Attenuation in dB(10 - Outline A)

Y: Material

Z: Flange type

Material naming rules:

C - Copper (Outline A)

Flange naming rules:

5 - UG-383/U (Outline A)

Examples:

To order a Waveguide Fixed Attenuator, 50~75GHz, 10dB, Copper, UG-383/U, specify QWFA15-5-10-C-5.

Customization is available upon request.