

QWSS-22 WR-22

Features:
* Low VSWR
* High Isolation

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar


Electrical

Frequency: 32.9–50.1GHz
VSWR: 1.1 max.
Insertion loss: 0.4dB max.

Mechanical

Length: 200mm
7.874in
Interface: WR-22 (BJ400)
Flange: UG383/U (FUGP400)
Material: Copper
Finish: Gold-plating

Outline Drawings

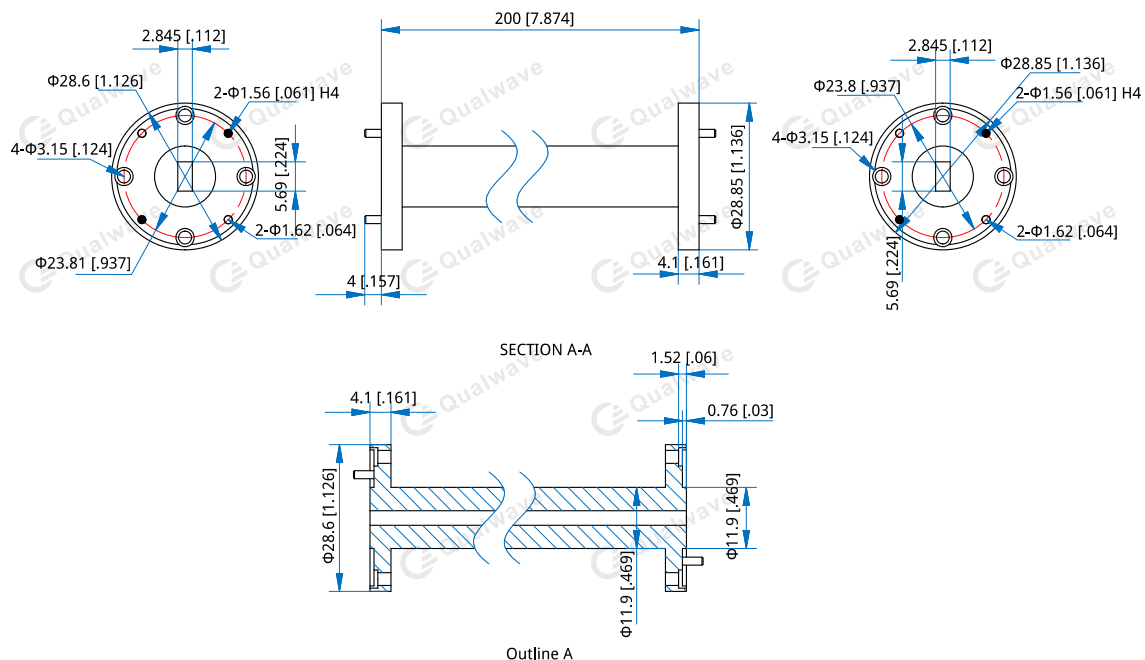

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

QWSS-22-X-Y-Z

X: Length

Y: Material

Z: Flange type

Length in mm:

200 - 200mm (Outline A)

Material naming rules:

C - Copper (Outline A)

Flange naming rules:

5 - UG-383/U mateable with FUGP400 (Outline A)

Examples:

To order a waveguide straight section, WR-22, 200mm, Copper, UG-383/U, specify QWSS-22-200-C-5.

Customization is available upon request.