

QWSS-75

WR-75

Features:
 * Low VSWR
 * High Isolation

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency (GHz)	VSWR (max.)	Insertion Loss	Outline Drawing
9.84~15	1.05	0.25dB/m	Outline A

Mechanical

Interface:	WR-75 (BJ120)
Flange:	FBP120 (Outline A)
Length:	100~3000mm
Material:	Aluminium
Finish:	Conductive oxidation (Outline A)
Coating:	Black paint (Outline A) Silver-plating

How To Order

QWSS-75-X-Y-Z

X: Length in mm.

Y: Material

Z: Flange type

Length in mm:

100 - 100mm

200 - 200mm

500 - 500mm

1000 - 1000mm

Material naming rules:

A - Aluminum (Outline A, B)

Flange naming rules:

1 - FBP (Outline A)


21 - Without flange (Outline B)

Examples:

To order a waveguide straight section, WR-75, 100mm, Aluminum, FBP120, specify QWSS-75-100-A-1.

Customization is available upon request.

Outline Drawings

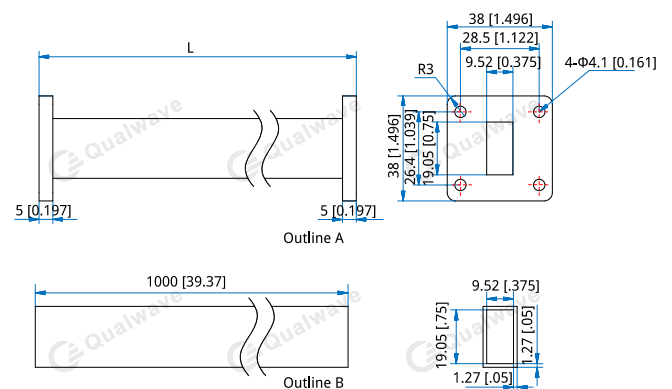

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]