



# QPD12-900-1300-K1-N

12-Way, 0.9~1.3GHz

Features:
\* Small Size
\* Low Insertion Loss

Applications: \* Amplifiers

\* Mixers \* Antennas

\* Laboratory Test

## **Electrical**

Frequency: 0.9~1.3GHz
Insertion Loss: 1.5dB max.

VSWR: 1.5 max.
Isolation: 20dB min.
Amplitude Balance: 0.4dB max.

Phase Balance: 8°

Power @SUM Port: 100W max. as divider

100W max. as combiner

#### Mechanical

Size\*1: 120\*300\*20mm


4.72\*11.811\*0.787in

Connectors: N Female

Mounting: 4-Φ3.2mm through-hole

[1] Exclude connectors.

# **Outline Drawings**

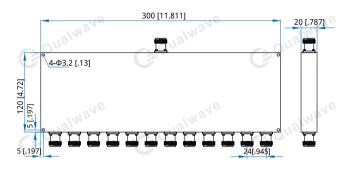

**Rev 1.1** 

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

## **How To Order**

QPD12-900-1300-K1-N

Customization is available upon request.