

# QPD2-800-1880-K2-N

## 2-Way, 0.8~1.88GHz

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

**Electrical**

Frequency:	0.8~1.88GHz
Insertion Loss:	0.3dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.20 max.
Isolation:	25dB min.
Amplitude Balance:	±0.2dB
Phase Balance:	±2°
Impedance:	50Ω
Average Power:	200W max. 20W max. as combiner

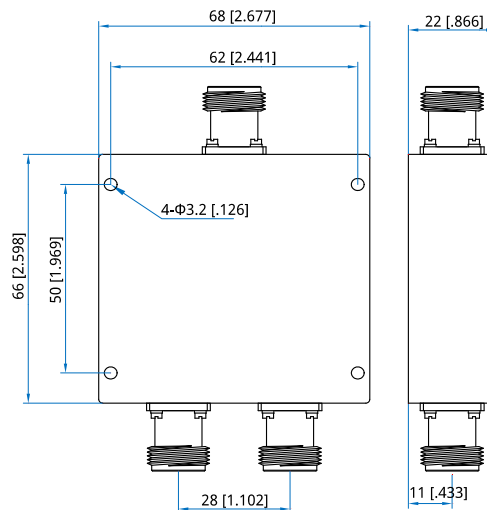
**Mechanical**

Size <sup>*1</sup> :	66*68*22mm 2.677*2.677*0.866in
Connectors:	N Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

**Environmental**

Operation Temperature:	-35~+75°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QPD2-800-1880-K2-N**

Customization is available upon request.