

QPD4-118-138-K5-N

4-Way, 118~138MHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	118~138MHz
Insertion Loss:	0.5dB max.
Input VSWR:	1.2 max.
Output VSWR:	1.2 max.
Isolation:	25dB min.
Amplitude Balance:	0.2dB max.
Phase Balance:	±2°
Impedance:	50Ω
Power @SUM Port:	500W max. as divider 200W max. as combiner

Mechanical


Size ^{*1} :	278*175*20mm 10.945*6.89*0.787in
Connectors:	N Female
Mounting:	4-Φ5.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

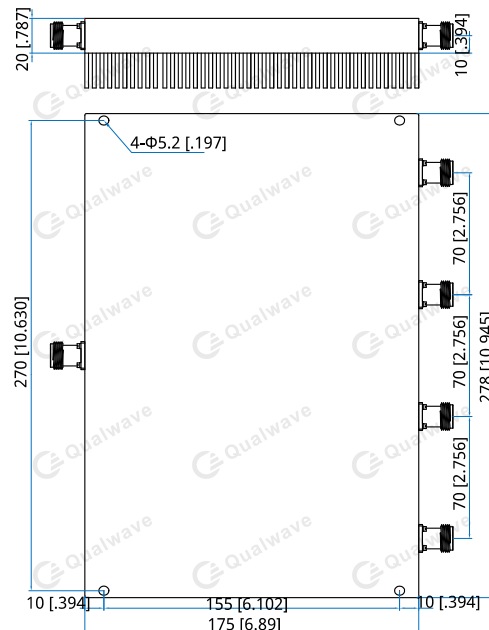

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD4-118-138-K5-N

Customization is available upon request.