

## QPD8-20-100-K15-S

8-Way, 0.02~0.1GHz

### Features:

- \* Small Size
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

### Electrical


Frequency:	0.02~0.1GHz
Insertion Loss:	1.3dB max.
VSWR:	1.5 max.
Isolation:	20dB min.
Amplitude Balance:	±0.2dB
Phase Balance:	±5°
Power @SUM Port:	150W as divider 150W as combiner

### Mechanical

Size <sup>*1</sup> :	164*126*26mm 6.457*4.961*1.024in
Connectors:	SMA Female
Mounting:	4-Φ4.5mm through-hole

[1] Exclude connectors.

### Outline Drawings

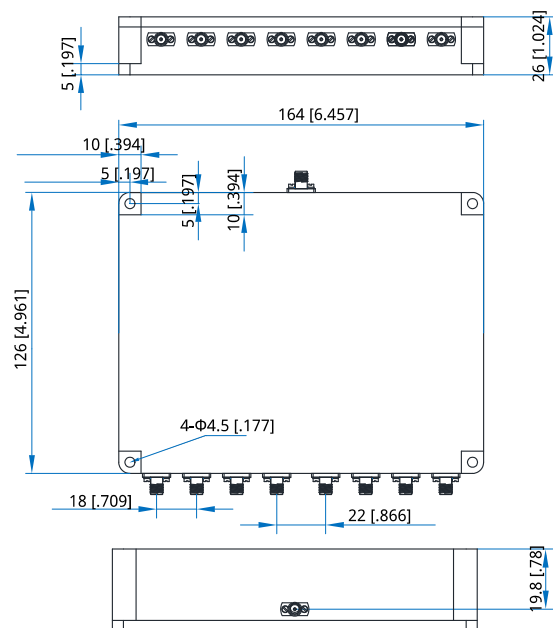

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

### How To Order

**QPD8-20-100-K15-S**

Customization is available upon request.