

QPD8-80-1000-K2-S

8-Way, 0.08~1GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical


Frequency:	0.08~1GHz
Insertion Loss:	1.3dB max.
Input VSWR:	1.35 max.
Output VSWR:	1.35 max.
Isolation:	15dB min.
Amplitude Balance:	±0.2dB max.
Phase Balance:	±5° max.
Impedance:	50Ω
Power @SUM Port:	200W max. as divider 200W max. as combiner

Mechanical

Size ^{*1} :	164*126*26mm 6.457*4.961*1.024in
Connectors:	SMA Female
Mounting:	4-Φ4.5mm through-hole

[1] Exclude connectors.

Outline Drawings

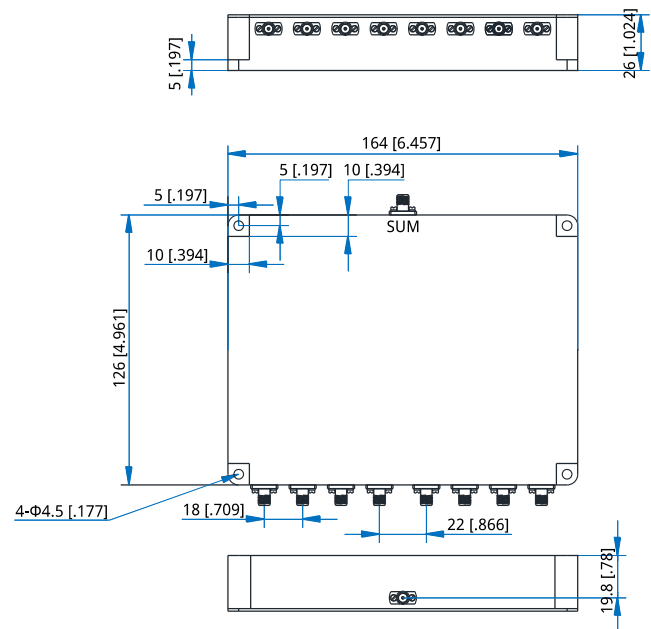

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD8-80-1000-K2-S

Customization is available upon request.