

## QWVA-90-B-1

WR-90, Brass, FBP100

### Features:

- \* Low VSWR
- \* High Attenuation Flatness

### Applications:

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar


### Electrical

Frequency:	8.2~12.4GHz
VSWR:	1.25 max.
Attenuation:	0~30dB
Insertion Loss:	0.5dB max.
Power:	1W max.

### Mechanical

Waveguide Size:	WR-90(BJ100)
Flange:	FBP100
Material:	Brass
Inner Cavity Coating:	Silver-Plated
Paint Color:	Sea Grey Paint

### Outline Drawings

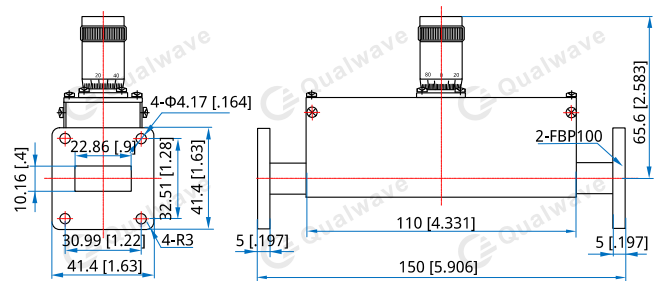

Unit: mm [in]

Tolerance:  $\pm 0.5\text{mm}$  [ $\pm 0.02\text{in}$ ]

### How To Order

**QWVA-90-B-1**

Customization is available upon request.