

### QPD2-20-1000-K5-N

2-Way, 0.02~1GHz

#### Features:

- \* Small Size
- \* Low Insertion Loss

#### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

#### Electrical

Frequency:	0.02~1GHz
Insertion Loss:	0.7dB max.
VSWR:	1.35 max.
Isolation:	15dB min.
Amplitude Balance:	0.1dB max.
Phase Balance:	3° max.
Impedance:	50Ω
Power @SUM Port:	500W max. as divider 500W max. as combiner

#### Mechanical

Size <sup>*1</sup> :	80*120*34mm 3.15*4.724*1.339in
Connectors:	N Female

[1] Exclude connectors.

#### Environmental


Temperature:	-55~+125°C
--------------	------------

#### How To Order

**QPD2-20-1000-K5-N**

Customization is available upon request.

#### Outline Drawings

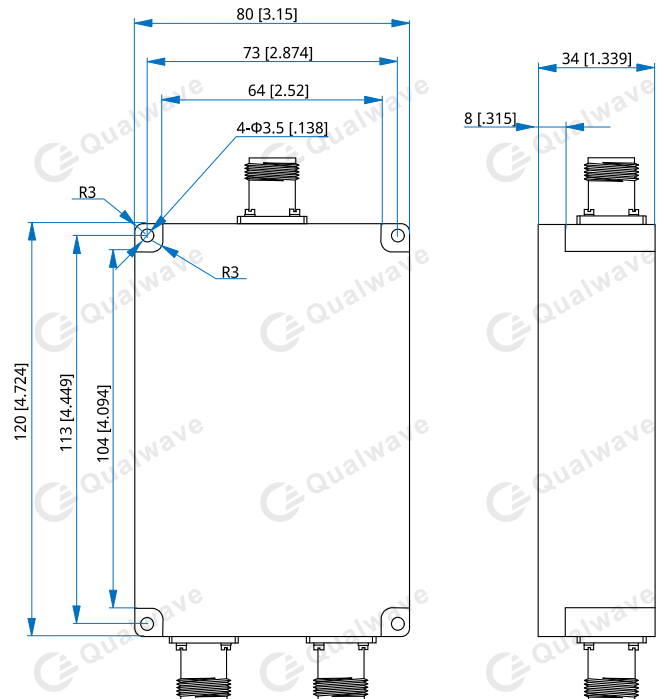

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]