

QPD16-500-6000-30

16-Way, 0.5~6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.5~6GHz
Insertion Loss:	4.8dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.3 max.
Isolation:	20dB min. (SMA) 18dB min. (N)
Amplitude Balance:	0.5dB max.
Phase Balance:	±8°
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 2W max. as combiner

Mechanical

Mounting: 4-Φ4.2mm through-hole

Environmental

Operation Temperature: -35~+75°C

How To Order

QPD16-500-6000-30-Y

Y: Connector type

Connector naming rules:

S - SMA Female (Outline A)


N - N Female (Outline B)

Examples:

To order a 16-way power divider, 0.5~6GHz, 30W, N female, specify QPD16-500-6000-30-N.

Customization is available upon request.

Outline Drawings

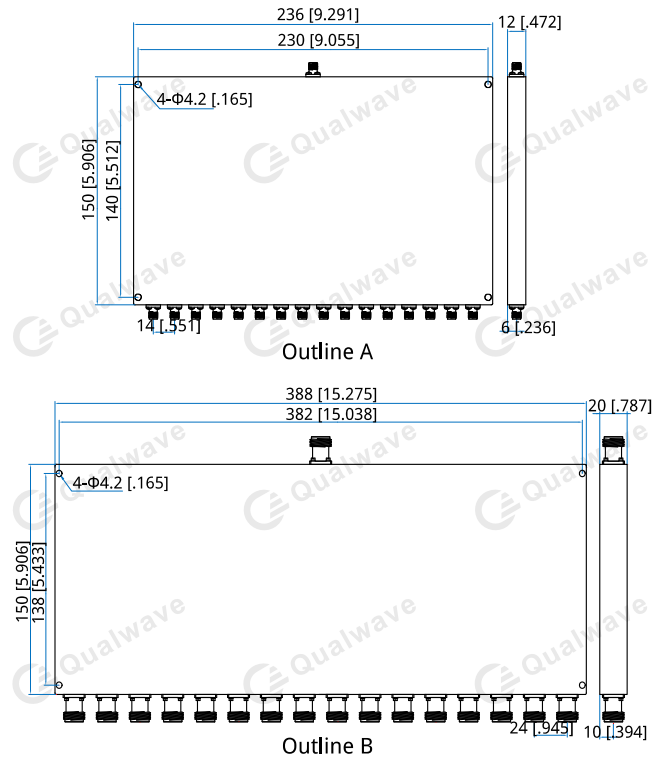

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]