

QPD2-200-2000-30-S

2-Way, 0.2~2GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.2~2GHz
Insertion Loss:	0.8dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	0.2dB max.
Phase Balance:	$\pm 3^\circ$
Impedance:	50 Ω
Power @SUM Port:	30W max. as divider 2W max. as combiner

Mechanical


Size ^{*1} :	85*44*12mm 3.346*1.732*0.472in
Connectors:	SMA Female
Mounting:	4- Φ 3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

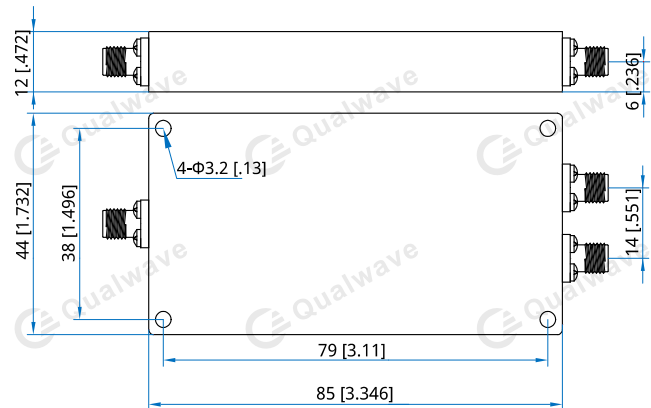

Unit: mm [in]
 Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

QPD2-200-2000-30-S

Customization is available upon request.