

QCN-MG-T50P-3

N Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC min.
Impedance:	50Ω

Mechanical


RF Connector:	N Male
Mating Cable:	QT50P
Outer Conductor:	303F stainless steel
Dielectric:	PTFE
Innerr Conductor:	Gold plated beryllium copper

How To Order

QCN-MG-T50P-3

Customization is available upon request.

Outline Drawings

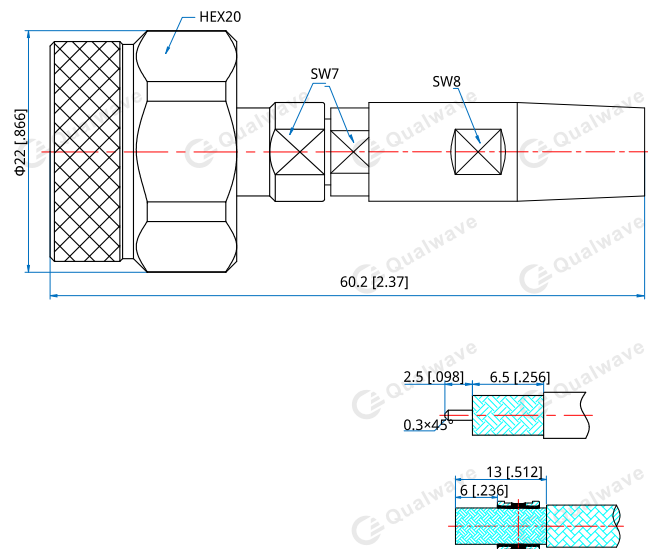

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]