

# QCS-MG-Z500W-1

## SMA Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency:	DC~26.5GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC min.
Impedance:	50Ω

### Mechanical



RF Connector:	SMA Male
Mating Cable:	QTF
Outer Conductor:	303F stainless steel

### How To Order

**QCS-MG-Z500W-1**

Customization is available upon request.

### Outline Drawings

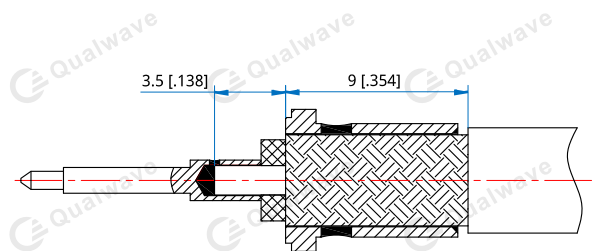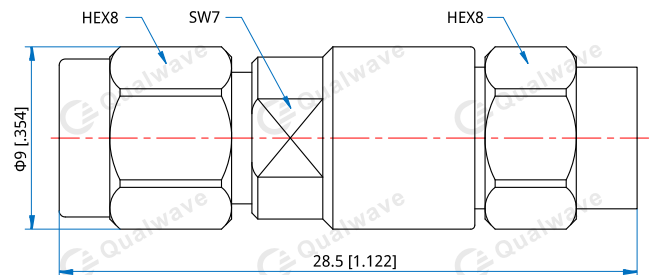

Unit: mm [in]

Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]