

QCI9662H

High Power, High Isolation

Features:
 * High Power
 * High Isolation
 * Low Insertion Loss
 * Low VSWR

Applications:
 * Wireless
 * Radar
 * Laboratory Test

Description


QCI9662H series Coaxial Isolators cover frequency range 350~470MHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency (MHz)	Bandwidth (MHz)	IL (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Fwd Power* ¹ (W Max.)	Rev Power (W)	Connector	Temperature (°C)
350~370	20	0.50	50.0	1.20	150	100	SMA, N	-30~+70
361~366	5	0.40	60.0	1.15	150	100	SMA, N	-30~+70
380~400	20	0.60	50.0	1.20	150	100	SMA, N	-30~+70
400~430	30	0.60	50.0	1.20	150	100	SMA, N	-30~+70
400~470	70	0.70	40.0	1.25	150	100	SMA, N	-30~+70
438~448	10	0.60	50.0	1.20	150	100	SMA, N	-30~+70
443~453	10	0.60	50.0	1.20	150	100	SMA, N	-30~+70
450~470	20	0.60	50.0	1.20	150	100	SMA, N	-30~+70

[1] The connector is SMA, and the maximum forward power can only reach 100W.

Outline Drawings

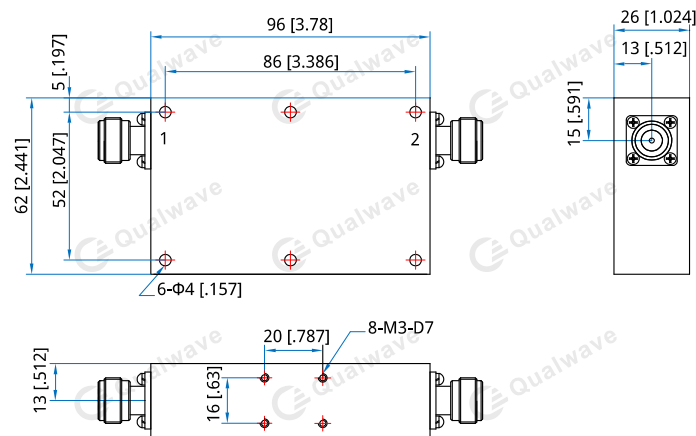

Unit: mm [inch] Tolerance: ±0.2mm [±0.008in]

Mechanical

Size*²: 96*62*26mm
 3.78*2.441*1.024in
 Mounting: 6-Φ4mm through-hole
 8-M3, depth 7mm

Connector Naming Rules:

N - N Female

Direction Naming Rules:

1 - Clockwise
 2 - Anticlockwise

[2] Exclude connectors and terminations.

How To Order

QCI9662H-U-V-W-X-Y-Z

U: Start frequency in MHz

V: Stop frequency in MHz

W: Forward power in W

X: Reverse power in W

Y: Connector type

Z: Direction type

Examples:

To order a QCI9662H series Isolator, 420~430MHz, Forward power 150W, Reverse power 100W, N female, Clockwise, specify QCI9662H-420-430-K15-K1-N-1.

Customization is available upon request.