

## QDPS-2000-18000-360-6

2~18GHz, 360°, 6Bits

Features:  
 \* Broadband  
 \* High Reliable

AppliEations:  
 \* Laboratory Test  
 \* Instrumentation

### Electrical

Frequency:	2~18GHz
Insertion Loss:	30dB max.
Phase Range:	360°
Control Bits:	6 Bits
Step:	5.625° typ.
Phase Flatness:	±5° typ.
Phase Accuracy:	±5° typ.
VSWR:	2.5 max.
Voltage/Current:	-5V/0.01A
Impedance:	50Ω
Power:	+24dBm
TTL Control Voltage:	0: 0V 1: +5V

### Mechanical

Size*1:	24*18*12mm 0.945*0.709*0.472in
RF Connectors:	SMA Female
Power Supply Connectors:	Feed Through/Terminal Post

[1] Exclude connectors.


### Environmental

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+125°C

### Control True Table

Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8
E6	E5	E4	E3	E2	E1	GND	VEE

### Outline Drawings

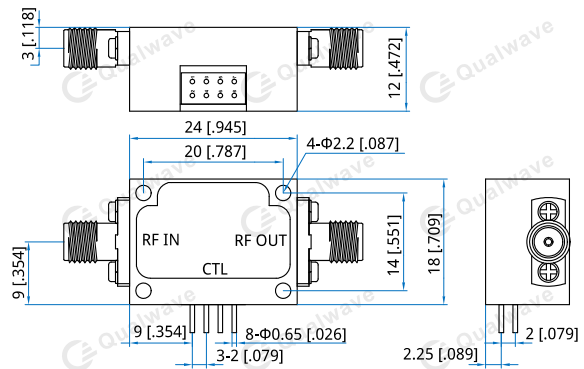

Unit: mm [in]  
 Tolerance: ±0.2mm [±0.008in]

### Logic Table

E1	E2	E3	E4	E5	E6	VEE
0	0	0	0	0	0	0
1	0	0	0	0	0	-5.625°
0	1	0	0	0	0	-11.25°
0	0	1	0	0	0	-22.5°
0	0	0	1	0	0	-45°
0	0	0	0	1	0	-90°
0	0	0	0	0	1	-180°
1	1	1	1	1	1	-354.375°

### How To Order

**QDPS-2000-18000-360-6**

Customization is available upon request.