

QDDC-0.009-100-K5-50-NS

9KHz~100MHz, 500W, 50dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	9KHz~100MHz
Coupling:	50±1dB
Coupling Flatness:	±0.5dB max.
VSWR:	1.2 max.
Insertion Loss:	0.3dB max.
Directivity:	16dB min.
Average Power:	500W CW

Mechanical


Size ^{*1} :	137.16*30.48*55.9mm 5.4*1.2*2.201in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-Φ3mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

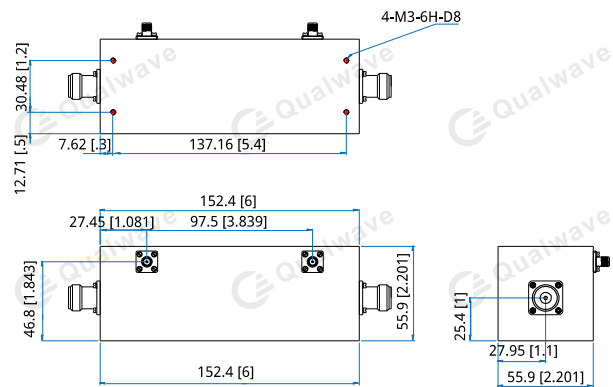

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDDC-0.009-100-K5-50-NS

Customization is available upon request.