

QWT28-1K WR-28, 1000W

Features:
* Low VSWR
* Broadband

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical


Frequency: 26.3~40GHz
Average Power: 1000W max.
VSWR: 1.2 max.

Mechanical

Interface: WR-28(BJ320)
Flange: FBP320

Customization is available upon request.

Outline Drawings

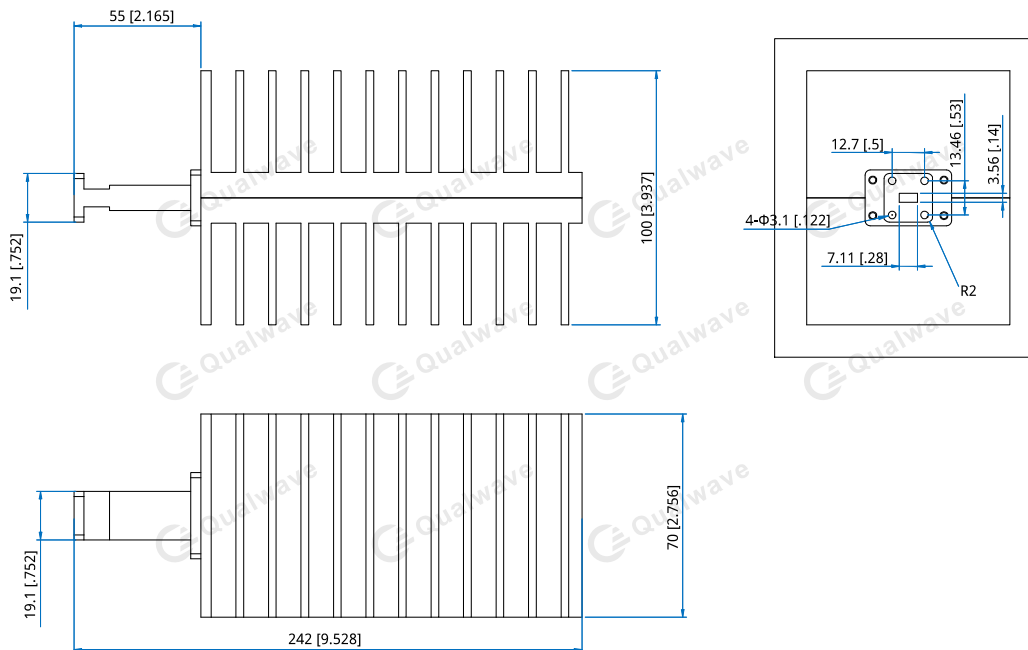

Outline A

Unit: mm [in]
Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

QWT28-1K-Y-Z

Y : Material

Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

Flange naming rules:

1 - FBP320 (Outline A)

Examples:

To order a high power waveguide termination, WR-28, 1KW, Aluminum, FBP320, specify QWT28-1K-A-1.

Customization is available upon request.