

QWT28-1K5 WR-28, 1.5KW

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 26.3~40GHz
Average Power: 1.5KW min.
VSWR: 1.2 max.


Mechanical

Waveguide Size: WR-28 (BJ320)
Flange: FBP320
Finish: Conductive oxidation
Coating: Gray paint

Environmental

Temperature: -55~+125°C

Outline Drawings

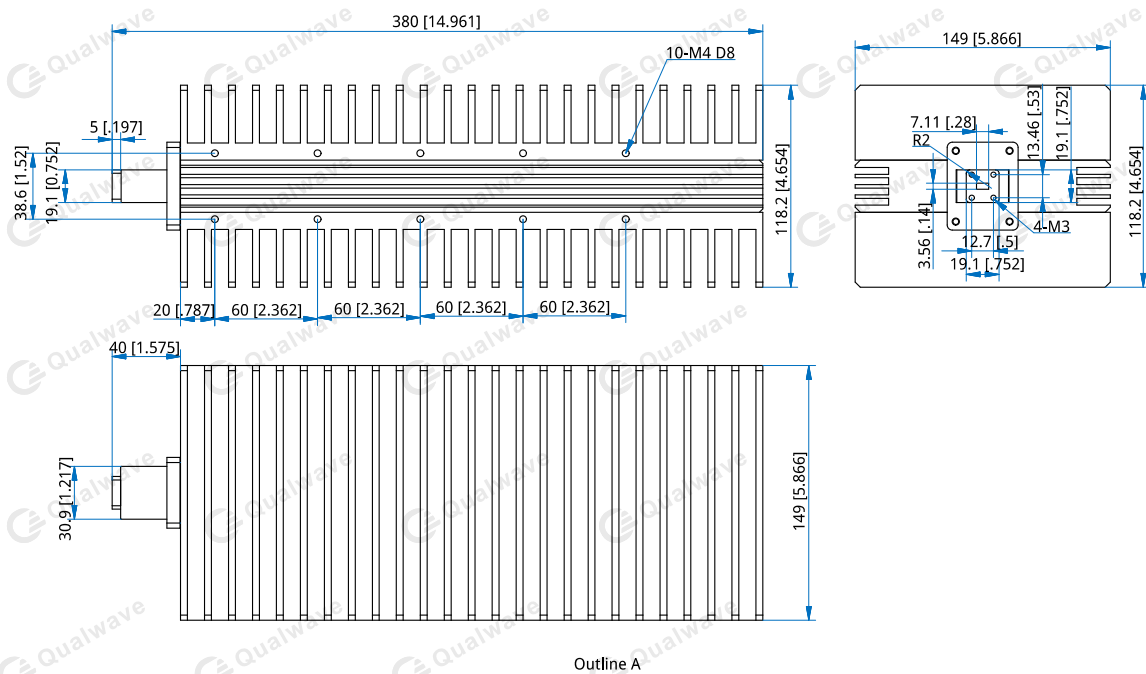

Unit: mm [in] Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

QWT28-1K5-Y-Z

Y : Material

Z : Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

1 - FBP320 (Outline A)

Examples:

To order a high power waveguide termination, WR-28, 1.5KW, Aluminum, FBP320, specify QWT28-1K5-A-1.

Customization is available upon request.