

QMP2-0-20000-1

DC~2GHz, 8~20GHz

Features: * High Stopband Rejection * Small Size	Applications: * Telecom * Laboratory Test * Transceivers * Instrumentation
---	---

Electrical

Channel 1 (L):	DC~2GHz
Channel 2 (H):	8~20GHz
Passband Insertion Loss:	1.5dB max.
Rejection (CH L):	50dB min. @2.3~20GHz
Rejection (CH H):	50dB min. @DC~7GHz
VSWR:	2 max.
Input Power:	5W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	47*70*10mm 1.85*2.756*0.394in
RF Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature: -40~+70°C

Outline Drawings

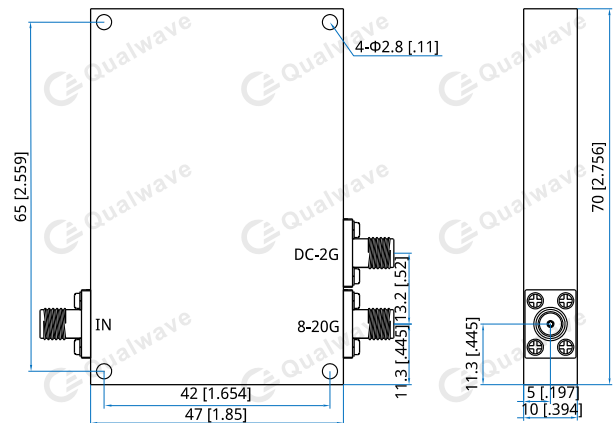

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QMP2-0-20000-1

Customization is available upon request.