

## QPDO-E-10-5.6

External Reference, 10MHz, 5.6GHz

**Features:**

- \* High Frequency Stability
- \* Ultra Low Phase Noise

**Applications:**

- \* Wireless
- \* Transceiver
- \* Laboratory Test
- \* Radar

### Electrical

Output Frequency:	5.6GHz
Output Power:	13dBm typ.
Spurious:	-80dBc max. @±1GHz
Harmonic:	-20dBc max.
External Reference:	10MHz
Input Power:	0±3dBm
Phase Noise:	-88dBc/Hz@100Hz -111dBc/Hz@1KHz -118dBc/Hz@10KHz -118dBc/Hz@100KHz -135dBc/Hz@1MHz
Voltage:	+12V DC
Current:	550mA max.
Lock Indicator (LI):	TTL logic High: locked Low: unlocked

### Mechanical


Size*1:	57.2*57.2*33.8mm 2.252*2.252*1.331in
RF Connectors:	SMA Female
Power Supply Interface:	Feed Through/Terminal Post
Mounting:	4-M2.5 through-hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-40~+75°C
Non-operating Temperature:	-55~+85°C

### Outline Drawings

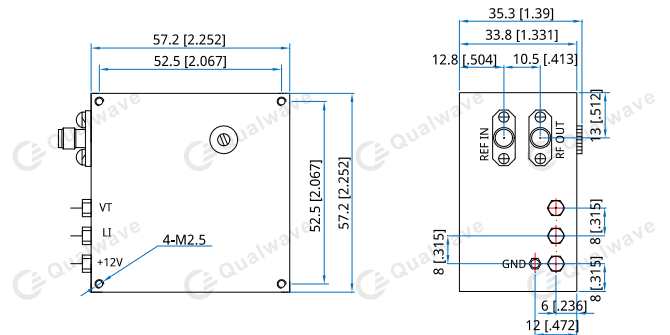

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QPDO-E-10-5.6**

Customization is available upon request.