

## QPDO-E-25-18.75

External Reference, 25MHz, 18.75GHz

**Features:**

- \* High Frequency Stability
- \* Ultra Low Phase Noise

**Applications:**

- \* Wireless
- \* Transceiver
- \* Laboratory Test
- \* Radar

### Electrical

Output Frequency:	18.75GHz
Output Power:	+13~+15dBm
Reference Input Power:	+4~+10dBm
Output Spurious:	-71dBc max. @±(10MHz to 2GHz)
Output Harmonics:	-20dBc max.
External Reference:	25MHz (-115dBc/Hz max. @10Hz -140dBc/Hz max. @100Hz -155dBc/Hz max. @1KHz -165dBc/Hz max. @10KHz -168dBc/Hz max. @100KHz)
Output Phase Noise:	-43dBc/Hz max. @10Hz -73dBc/Hz max. @100Hz -83dBc/Hz max. @1KHz -95dBc/Hz max. @10KHz -105dBc/Hz max. @100KHz -115dBc/Hz max. @1MHz -136dBc/Hz max. @10MHz min.
Voltage:	+12±0.5V DC
Current:	450mA max.
Lock Indicator (LI):	TTL logic High: locked Low: unlocked

### Environmental


Operating Temperature:	-45~+75°C
Non-operating Temperature:	-55~+85°C

### Mechanical

Size*1:	57.2*57.2*33.8mm 2.252*2.252*1.331in
RF Connectors:	SMA Female
Power Supply Interface:	Feed Through/Terminal Post
Mounting:	3-Φ3.2mm through-hole

[1] Exclude connectors.

### Outline Drawings

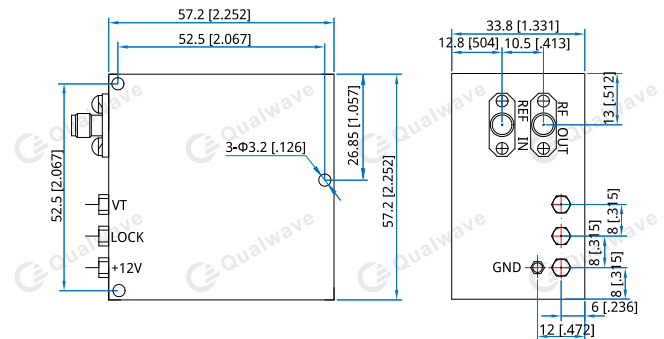

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

#### QPDO-E-25-18.75

Customization is available upon request.