

QPDO-E-25-19.05

External Reference, 25MHz, 19.05GHz

Features:

- * High Frequency Stability
- * Ultra Low Phase Noise

Applications:

- * Wireless
- * Transceiver
- * Laboratory Test
- * Radar

Electrical

Output Frequency:	19.05GHz
Output Power:	+13~+15dBm
Reference Input Power:	10±3dBm
Output Spurious:	-76dBc max. @±(10MHz to 2GHz)
Output Harmonics:	-20dBc max. (@9.525GHz, @28.575GHz)
External Reference:	25MHz (-110dBc/Hz max. @10Hz -137dBc/Hz max. @100Hz -156dBc/Hz max. @1KHz -165dBc/Hz max. @10KHz -168dBc/Hz max. @100KHz)
Output Phase Noise:	-42dBc/Hz max. @10Hz -67dBc/Hz max. @100Hz -98dBc/Hz max. @1KHz -106dBc/Hz max. @10KHz -109dBc/Hz max. @100KHz -126dBc/Hz max. @1MHz min.
Input VSWR:	3 max.
Voltage:	+12±0.5V DC
Current:	700mA max. (first) 500mA max. (stable)
Lock Indicator (LI):	TTL logic High: locked Low: unlocked

Explanatory Note:

1. Phase noise between two specified frequency points shall be lower than the straight line drawn between the two points on a dB vs. log frequency plot.
2. RoHS requirement as per Directive 2011/65/ EU and its subsequent amendments, including the Directive EU 2015/863.

Environmental


Operating Temperature:	-45~+75°C
Non-operating Temperature:	-55~+85°C

Mechanical

Size*1:	57.2*57.2*33.8mm 2.252*2.252*1.331in
RF Connectors:	SMA Female
Power Supply Interface:	Feed Through/Terminal Post
Mounting:	3-Φ3.2mm through-hole

[1] Exclude connectors.

Outline Drawings

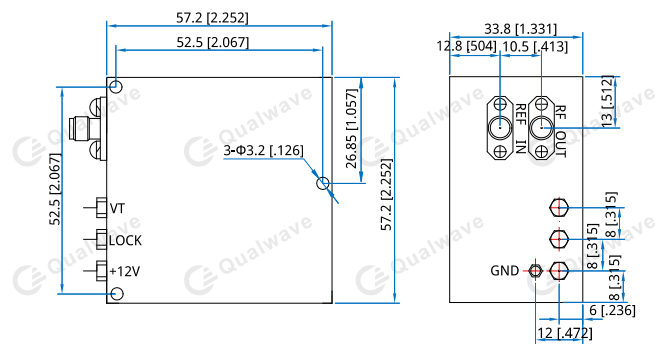

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

QPDO-E-25-19.05

Customization is available upon request.