

QPAS-4-30-40-40S

4~30MHz, 40dB, 40dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	4~30MHz
Power Gain:	40dB min.
Gain Flatness:	±2dB typ.
Output Power (Psat):	40dBm min.
2th Harmonic:	-25dBc typ.
Spurious:	-65dBc typ.
Input VSWR:	1.45 typ.
Output VSWR:	2 typ.
Voltage:	+220V AC typ.
Input Power:	+5dBm max.
Impedance:	50Ω

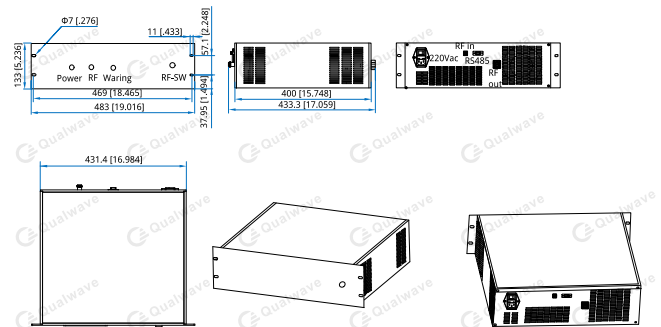
Mechanical

Size ^{*1} :	483*400*133mm 19.016*15.748*5.236in
RF In Connectors:	SMA female
RF Out Connectors:	N female
Power Supply Interface:	AC-03 20A/250V
Cooling:	Forced air

[1] Exclude connectors, rack mount brackets, handles.

Environmental

Operating Temperature:	-10~+50°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPAS-4-30-40-40S

Customization is available upon request.