

QPA-38000-42000-25-30

38~42GHz, 25dB, 30dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	38~42GHz
Gain:	25dB min.
Gain Flatness:	±1.5dB typ.
Output Power (P1dB):	29dBm min. 30dBm typ.
Spurious:	-60dBc max.
VSWR:	2 typ.
Voltage:	+6V DC
Current:	2.2A typ.
Input Power:	+15dBm max.
Impedance:	50Ω
EN:	TTL High: On TTL Low/NC: Off

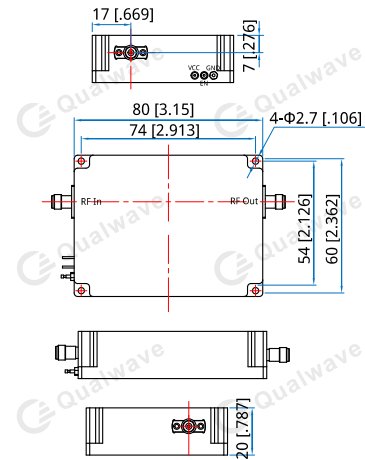
Mechanical

Size*1:	80*60*20mm 3.15*2.362*0.787in
Weight:	300g max.
RF Connectors:	2.92mm Female
Mounting:	4-Φ2.7mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QPA-38000-42000-25-30

Customization is available upon request.