

QSDC-500-2000-10-15-S

0.5~2GHz, 10W, 15dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

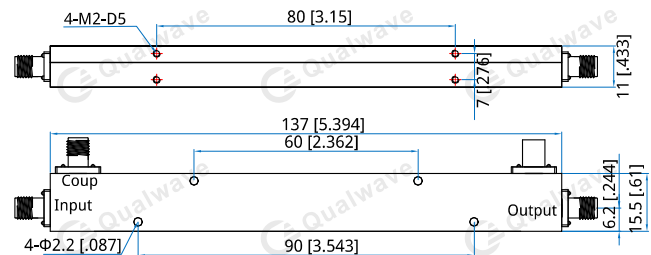
Electrical

Frequency:	0.5~2GHz
Insertion Loss:	1dB max.
Coupling:	15±1dB
Directivity:	18dB min.
VSWR:	1.3 max.
Impedance:	50Ω
Average Power:	10W

Mechanical

Size ^{*1} :	137*15.5*11mm 5.394*0.61*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole 4-M2, depth 5mm

[1] Exclude connectors and terminations.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QSDC-500-2000-10-15-S

Customization is available upon request.