

# QPS2-400-12000-R-1

## SPDT, 0.4~12GHz, Reflective

Features:  
 \* Low Insertion Loss  
 \* High Isolation

Applications:  
 \* Wireless  
 \* Transmitter  
 \* Laboratory Test  
 \* Radar

### Electrical

|                  |                                 |
|------------------|---------------------------------|
| Frequency:       | 0.4~12GHz                       |
| Insertion Loss:  | 2.2dB max.                      |
| Isolation:       | 70dB min.                       |
| VSWR:            | 1.5 max.                        |
| Input Power:     | 30dBm max.                      |
| Voltage/Current: | +5V@100mA max.<br>-5V@50mA max. |
| Control:         | TTL High - 1<br>TTL Low/NC - 0  |

### Mechanical


|                          |                                       |
|--------------------------|---------------------------------------|
| Size <sup>*1</sup> :     | 25*17.5*10.2mm<br>0.984*0.689*0.402in |
| Switching Time:          | 100nS max.                            |
| RF Connectors:           | SMA Female                            |
| Power Supply Connectors: | Feed Through/Terminal Post            |
| Housing Material:        | Nickel plated aluminum                |
| Mounting:                | 4-Φ2.7mm through-hole                 |

[1] Exclude connectors.

### Environmental

|                            |            |
|----------------------------|------------|
| Operating Temperature:     | -40~+85°C  |
| Non-operating Temperature: | -55~+125°C |

### Outline Drawings

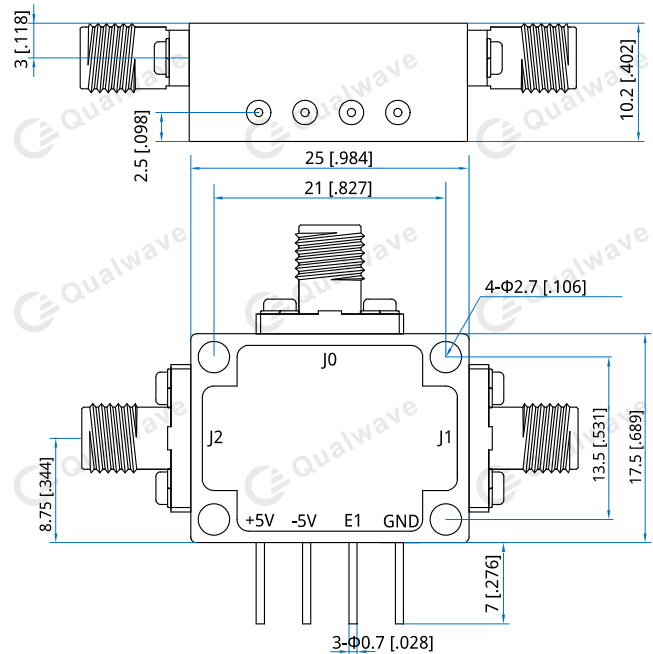

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### Control True Table

| E1 | Connection |
|----|------------|
| 0  | J0 - J1 On |
| 1  | J0 - J2 On |

### How To Order

**QPS2-400-12000-R-1**

Customization is available upon request.