

QPS4-500-18000-A-1

SP4T, 0.5~18GHz, Absorptive

Features:

- * Low Insertion Loss
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.5~18GHz
Insertion Loss:	3.2dB max.
Isolation:	75dB min.
VSWR:	2 max.
Input Power:	30dBm max.
Voltage/Current:	+5V@200mA max.
	-5V@50mA max.
Control:	TTL High - 1
	TTL Low/NC - 0
Impedance:	50Ω

Mechanical

Switching Time:	100ns max.
RF Connectors:	SMA Female
Power Supply Connectors:	Feed Through/Terminal Post
Housing Material:	Nickel plated aluminum
Mounting:	2-Φ2.2mm through-hole

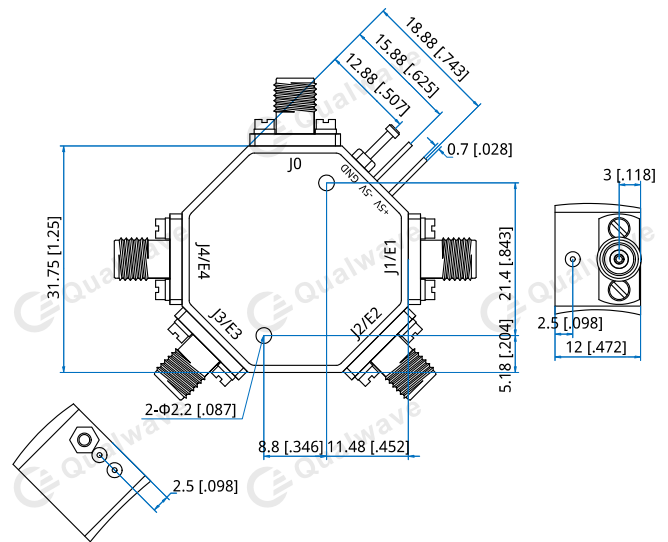
Environmental

Operating Temperature:	-40~+85°C
Non-operating Temperature:	-55~+125°C

How To Order

QPS4-500-18000-A-1

Customization is available upon request.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Control True Table

E4	E3	E2	E1	Connection
1	1	1	0	J0 - J1 On
1	1	0	1	J0 - J2 On
1	0	1	1	J0 - J3 On
0	1	1	1	J0 - J4 On