

QDDC-2000-6000-K2-40-NS

2~6GHz, 200W, 40dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	2~6GHz
Insertion Loss:	0.3dB max.
Coupling:	40±1dB
Coupling Flatness:	±0.5dB
Directivity:	15dB min.
VSWR (Mainline):	1.3 max.
VSWR (Coupling):	1.5 max.
Average Power:	200W CW

Mechanical


Size ^{*1} :	58*28*25.4mm 2.283*1.102*1in
Coupling Connectors:	SMA Female
RF Connectors:	N Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

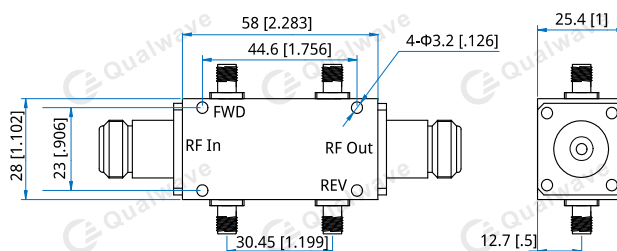

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QDDC-2000-6000-K2-40-NS

Customization is available upon request.