

# QFA4030

## DC~40GHz, 30W

Features:  
 \* Low VSWR  
 \* High Attenuation Flatness

Applications:  
 \* Wireless  
 \* Transmitter  
 \* Laboratory Test  
 \* Radar

### Electrical

Frequency: DC~40GHz  
 Attenuation: 10dB, 20dB, 30dB, 40dB  
 Impedance: 50Ω  
 Average Power\*1: 30W@25°C max.  
 Peak Power: 200W (5μS pulse width, 10% duty cycle)

[1] Derated linearly to 3W@125°C.


### Mechanical

RF Connectors: 2.92mm  
 Housing: Aluminum  
 Dielectric: PEI  
 Outer Conductor: Passivated stainless steel  
 Male Inner Conductor: Gold plated brass  
 Female Inner Conductor: Gold plated beryllium copper

### Environmental

Temperature: -55~+125°C

### Outline Drawings

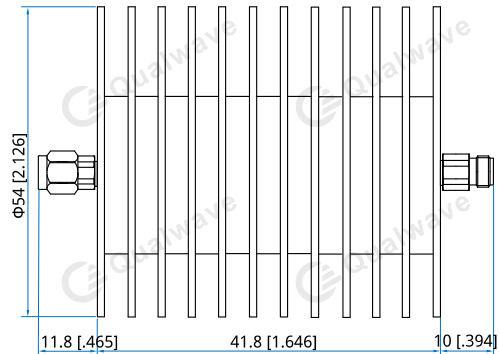

Unit: mm [in]  
 Tolerance: ±2%

### Attenuation Accuracy and VSWR

Frequency (GHz)	Attenuation Accuracy (±dB) vs. Attenuation (dB)				VSWR (max.)
	10	20	30	40	
DC~40	-1.5/+2.0	-1.5/+2.0	-1.5/+2.0	-1.5/+2.0	1.35

### How To Order

#### QFA4030-X-Y-Z

X: Frequency in GHz  
 Y: Attenuation in dB  
 Z: Connector type

Connector naming rules:  
 K - 2.92mm

Examples:  
 To order an attenuator, DC~40GHz, 2.92mm male to 2.92mm female, 20dB attenuation, specify QFA4030-40-20-K.