

QPDO-E-100-17.95

External Reference, 100MHz, 17.95GHz

Features:

- * High Frequency Stability
- * Ultra Low Phase Noise

Applications:

- * Wireless
- * Transceiver
- * Laboratory Test
- * Radar

Electrical

Output Frequency:	17.95GHz
Output Power:	13dBm min
Output Spurious:	-70dBc max.
Output Harmonics:	-20dBc max.
External Reference:	100MHz
Reference Input Power:	3~10dBm
Output Phase Noise:	-46dBc/Hz@10Hz -75dBc/Hz@100Hz -102dBc/Hz@1KHz -108dBc/Hz@10KHz -110dBc/Hz@100KHz -130dBc/Hz@1MHz
Voltage:	+12V DC
Current:	300mA max.
Lock Indicator (LI):	TTL logic High: locked Low: unlocked

Mechanical


Size*1:	57.2*57.2*15.7mm 2.252*2.252*0.618in
RF Connectors:	SMA Female
Power Supply Interface:	Feed Through/Terminal Post
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-45~+85°C

Outline Drawings

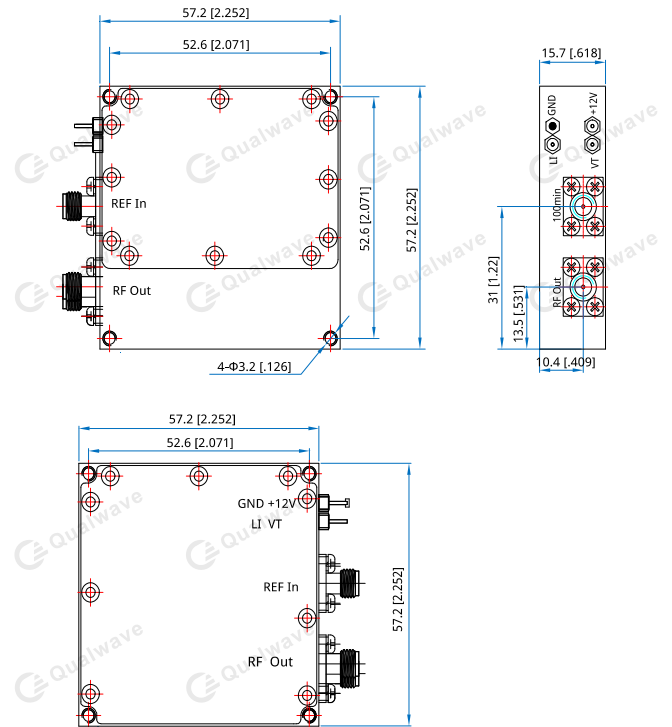

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QPDO-E-100-17.95

Customization is available upon request.